16

(9)

BRUHAT BANGALORE MAHANAGARA PALIKE

DASARAHALLI ZONE

Name of Work :- Detailed Estimate for Improvements to Roads and Drains at 3rd Main of Defence Colony in Ward.No. 14, Bangalore.

Estimated Cost Rs. 19.80 Lakhs

ASSISTANT EXECUTIVE ENGINEER

T.DASARAHALLI SUB DIVISION,

B.B.M.P, BANGALORE

BRUHAT BANGALORE MAHANAGARA PALIKE

DASARAHALLI ZONE

15

Name of Work :-Improvements to Roads and Drains at 3rd Main of Defence Colony in Ward.No. 14, Bangalore

Est. Cost Rs 19.80 Lakhs

Sl. No	Description of Item	Unit	No	L	B	D	Qty	Rate	Amount
1	KSRRB 300 - Excavation for road, drains and similar works - KSRRB 300-2. Earthwork excavation by manual means in hard soil involving an average horizontal throw upto 2 meters and an average lift upto 0.5 m, excavated surface leveled and sides neatly dressed, the disposed earth to be leveled neatly after breaking of clods complete as per specifications complete as per specifications. MORTH Chapter 3 (P.150/I.19.2 PW, P & IWTD - SR 2012-13)	Cum							
	3rd Main of Defence Colony - R/S		1	101.00	1.20	1.00	121.20		
			1	35.00	1.20	1.00	42.00		
	3rd Main of Defence Colony - L/S		1	144.00	1.20	1.00	172.80		
	Cross Roads		1	20.40	1.20	1.00	24.48		
							360.48	81.00	29199.00
	Basic Rate	75.00							
	Add Area Weightage 8%	6.00							
	Total	**81.00**							
2	KSRB 4-1.3: Providing and laying in position plain cement concrete of mix M7.5 with OPC cement @180 kgs, with 40mm and down size graded granite metal coarse aggregates @0.85cum and fine aggregates @0.57cum machine mixed, concrete laid in layers not exceeding 15 cms. thick, well compacted, in foundation and plinth, including cost of all materials, labour, HOM of machinery, curing complete as per specifications. Specification No. KBS 4.1, 4.2 (P.12/I.4.3) PW, P & IWTD - SR 2012-13)	Cum							
	3rd Main of Defence Colony - R/S		1	101.00	1.20	0.15	18.18		
			1	35.00	1.20	0.15	6.30		
	3rd Main of Defence Colony - L/S		1	144.00	1.20	0.15	25.92		
	Cross Roads		1	20.40	1.20	0.15	3.67		
							54.07	3812.82	206167.00
	Basic Rate	3597.00							
	Add Area Weightage 6%	215.82							
	Total	**3812.82**							
3	KSRB 4-2.2: Providing and laying in position plain cement concrete of design mix M20 with OPC cement @320 kgs, with 20mm and down size graded granite metal coarse aggregates @0.878cum and fine aggregates @0.459cum, with superplastisiser @3lts confirming to IS9103-1999 Reafirmed-2008, machine mixed, concrete laid in layers not blocks, anchor blocks, plain window cills, fillets etc., including cost of all materials, labour, HOM of machinery, curing, complete as per specifications. Specification No. KBS 4.1, 4.6 (P.13/I.4.11) PW, P & IWTD - SR 2012-13)	Cum							
	For Bottom								

ಸಂಖ್ಯೆ:EE/DD/TS/336/12-13 ದಿನಾಂಕ: 31/01/2013
ರೂ.19.80 Lakhs (Rupees Nineteen Lakh eighty thousand only)
ಗಳ ಅಂದಾಜು ಪಟ್ಟಿಗೆ ಆಡಳಿತಾತ್ಮಕ ಮಂಜೂರಾತಿ ನೀಡಿದೆ.
ಮುಖ್ಯ ಅಭಿಯಂತರರು
ಬೃಹತ್ ಬೆಂಗಳೂರು ಮಹಾನಗರ ಪಾಲಿಕೆ
ದಾಸರಹಳ್ಳಿ ವಲಯ, ಬೆಂಗಳೂರು

	3rd Main of Defence Colony - R/S		1	101.00	1.20	0.15	18.18		
			1	35.00	1.20	0.15	6.30		
	3rd Main of Defence Colony - L/S		1	144.00	1.20	0.15	25.92		
	Cross Roads		1	20.40	1.20	0.15	3.67		
	For Sides								
	3rd Main of Defence Colony - R/S		2	101.00	0.15	0.60	18.18		
			2	35.00	0.18	0.60	7.56		
	3rd Main of Defence Colony - L/S		2	144.00	0.15	0.60	25.92		
	Cross Roads		2	20.40	0.15	0.60	3.67		
	Covering Slab		1	35.00	1.00	0.20	7.00		
							116.40	5142.06	598556.00
	Basic Rate	4851.00							
	Add Area Weightage 6%	291.06							
	Total	**5142.06**							
4	KSRB 4.9.2 : Providing TMT steel reinforcement for R.C.C work including straightening, cutting, bending, hooking, placing in position, lapping and / or welding wherever required, tying with binding wire and anchoring to the adjoining members wherever necessary complete as per design (laps, hooks and wastage shall not be measured and paid) cost of materials, labour, HOM of machinery complete as per specifications. Specification No. KBS 4.6.3 (P.19/I.4.46) PW, P & IWTD - SR 2012-13)	q							
	For Bottom & Sides		109.40	Kg/Cum	45.00		4923.18		
	For Covering Slab		7.00	Kg/Cum	60.00		420.00		
							5343.18		
						Say	**53.43**	7187.86	384060.00
	Basic Rate	6781.00							
	Add Area Weightage 6%	406.86							
	Total	**7187.86**							
5	KSRB 4-6.4: Providing and removing centering, shuttering, strutting, propping etc., and removal of form work for vertical surface such as walls at any thickness, including attached pilasters, buttresses, plinth and string courses cost of all materials, labour complete as per specifications. Specification No. KBS 4.6.2 (P.17/I.4.31) PW, P & IWTD - SR 2012-13)	Sqm							
	3rd Main of Defence Colony - R/S		2x2	101.00		0.60	242.40		
			2x2	35.00		0.60	84.00		
	3rd Main of Defence Colony - L/S		2x2	144.00		0.60	345.60		
	Cross Roads		2x2	20.40		0.60	48.96		
	Covering Slab		1	35.00	0.60		21.00		
							741.96	239.56	177744.00
	Basic Rate	226.00							
	Add Area Weightage 6%	13.56							
	Total	**239.56**							
6	Supplying and fixing precast rainforced concee slab 10cm thick including cost of reinforcement as per design and drawing material cost, transportation, hire charges of machinery, machine cutting the vertical face to get plain even surface stc., complete with all leads and lift conveyance charges, labour charges inclusive of cost of all materials.	Sqm							
	As per Approved Rates		1	101.00	0.90		90.90		
			1	144.00	0.90		129.60		
			1	20.40	0.90		18.36		
							238.86	1600.00	382176.00

7	Disposal of debris to the final place of disposal with all lead and lift and as direction by the engineer in charge of the work, lead 4 Km a) Basic rate for haulage of materials as per item No. 17.4/KSRRB : M100-4.1 ..... Rs. 2.00 Tonne/Km b) Average earth of work 1.28 Tonne/Km for Rs. 2.00/Km c) Add loading and unloading **Page No. 148 Item No. 17.1 PWD SR 2012-13**	Cum							
			Qty Vide Item No. 1				**360.48**	76.79	27680.00
	2 x 1.28 x 4 Kmtrs	10.24							
		62.20							
	Basic Rate	**72.44**							
	Add Area Weightage 6%	4.35							
	Total	**76.79**							
8	Providing and fixing Pre cast solid concrete kerb stones of size 450x150x500mm made out of CC 1:2:4 and finished with CM 1:3 plastering and finishing cutting etc., complete. (P.28/I.5.29.2) PW, P & IWTD - SR 2012-13)	No							
			1	101.00			101.00		
			1	35.00			35.00		
			1	144.00			144.00		
			1	20.40			20.40		
							300.40		
			Qty / 0.45				**668.00**	239.56	160026.00
	Basic Rate	226.00							
	Add Area Weightage 6%	13.56							
	Total	**239.56**							
9	KSRB 15-17.6: Providing and applying painting two coats (excluding priming coat) on new wood surface and/or wood based surface with enamel paint to give an even shade, cleaning the surface of all dirt, dust and foreign matter, sand papering including cost of materials, labour, complete as per specifications. (P.126/I.15.60.1 PW, P & IWTD -SR 2012-13)	Sqm							
			1	101.00		0.60	60.60		
			1	35.00		0.60	21.00		
			1	144.00		0.60	86.40		
			1	20.40		0.60	12.24		
							180.24	76.68	13821.00
	Basic Rate	71.00							
	Add Area Weightage 8%	5.68							
	Total	**76.68**							
8	Miscellaneous and Unforeseen Charges etc.., complete	LS							**571**
								Total	**1980000**

(Rupees Nineteen Lakhs Eighty Thousand Only)

CERTIFICATE

1) The Work spot has been inspected and the work is found to be necessary
2) The Estimate is prepared as per the PW,P & IWTD - SR - 2012-13
3) The Provision made in estimate are adequante and essential
4) This area comes under B.B.M.P Limits.

A/S
JC(DH) AS 549/12-13
30/09/13
Fr. Rupees 19.80 lakhs (Rupees nineteen lakhs eighty thousand only)

Assistant Engineer
Ward-14

Assistant Executive Engineer
T.Dasarahalli Sub-Division
B.B.M.P

Executive Engineer
Dasarahalli Division
B.B.M.P. Bangalore.

Page No. 079
Sl. No. 549

Name of Work: Improvements to roads and drains at 3rd Main & Defence Colony in Ward No-14.

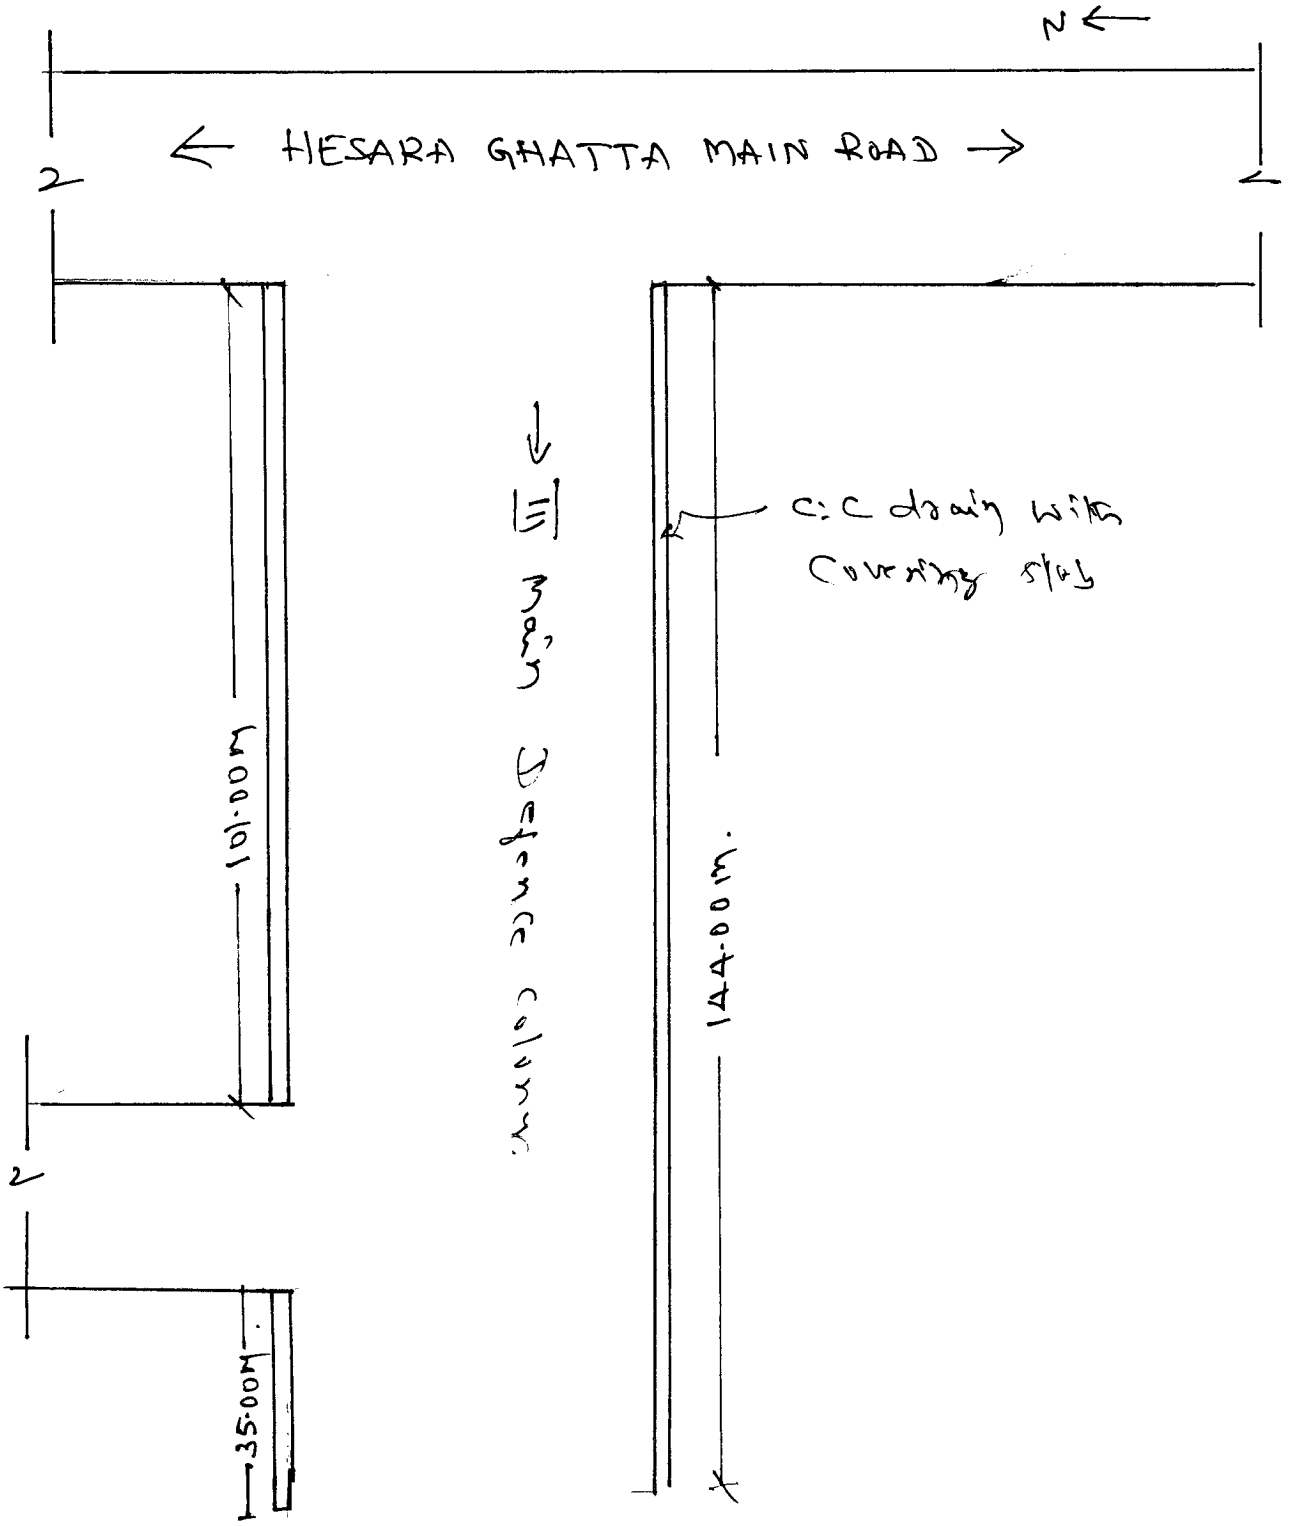

ಸಹಾಯಕ ಕಾರ್ಯನಿರ್ವಾಹಕ ಅಭಿಯಂತರರು
ಆ. ದಾಸರಹಳ್ಳಿ ಉಪ ವಿಭಾಗ
ಬೃಹತ್ ಬೆಂಗಳೂರು ಮಹಾನಗರ ಪಾಲಿಕೆ
ಸಾಗಲಗುಂಟೆ, ಬೆಂಗಳೂರು - 560 073

11

(3)

LEAD CHART FOR TRANSPORTING SILT FROM WORK SPOT TO DUMPING YARD

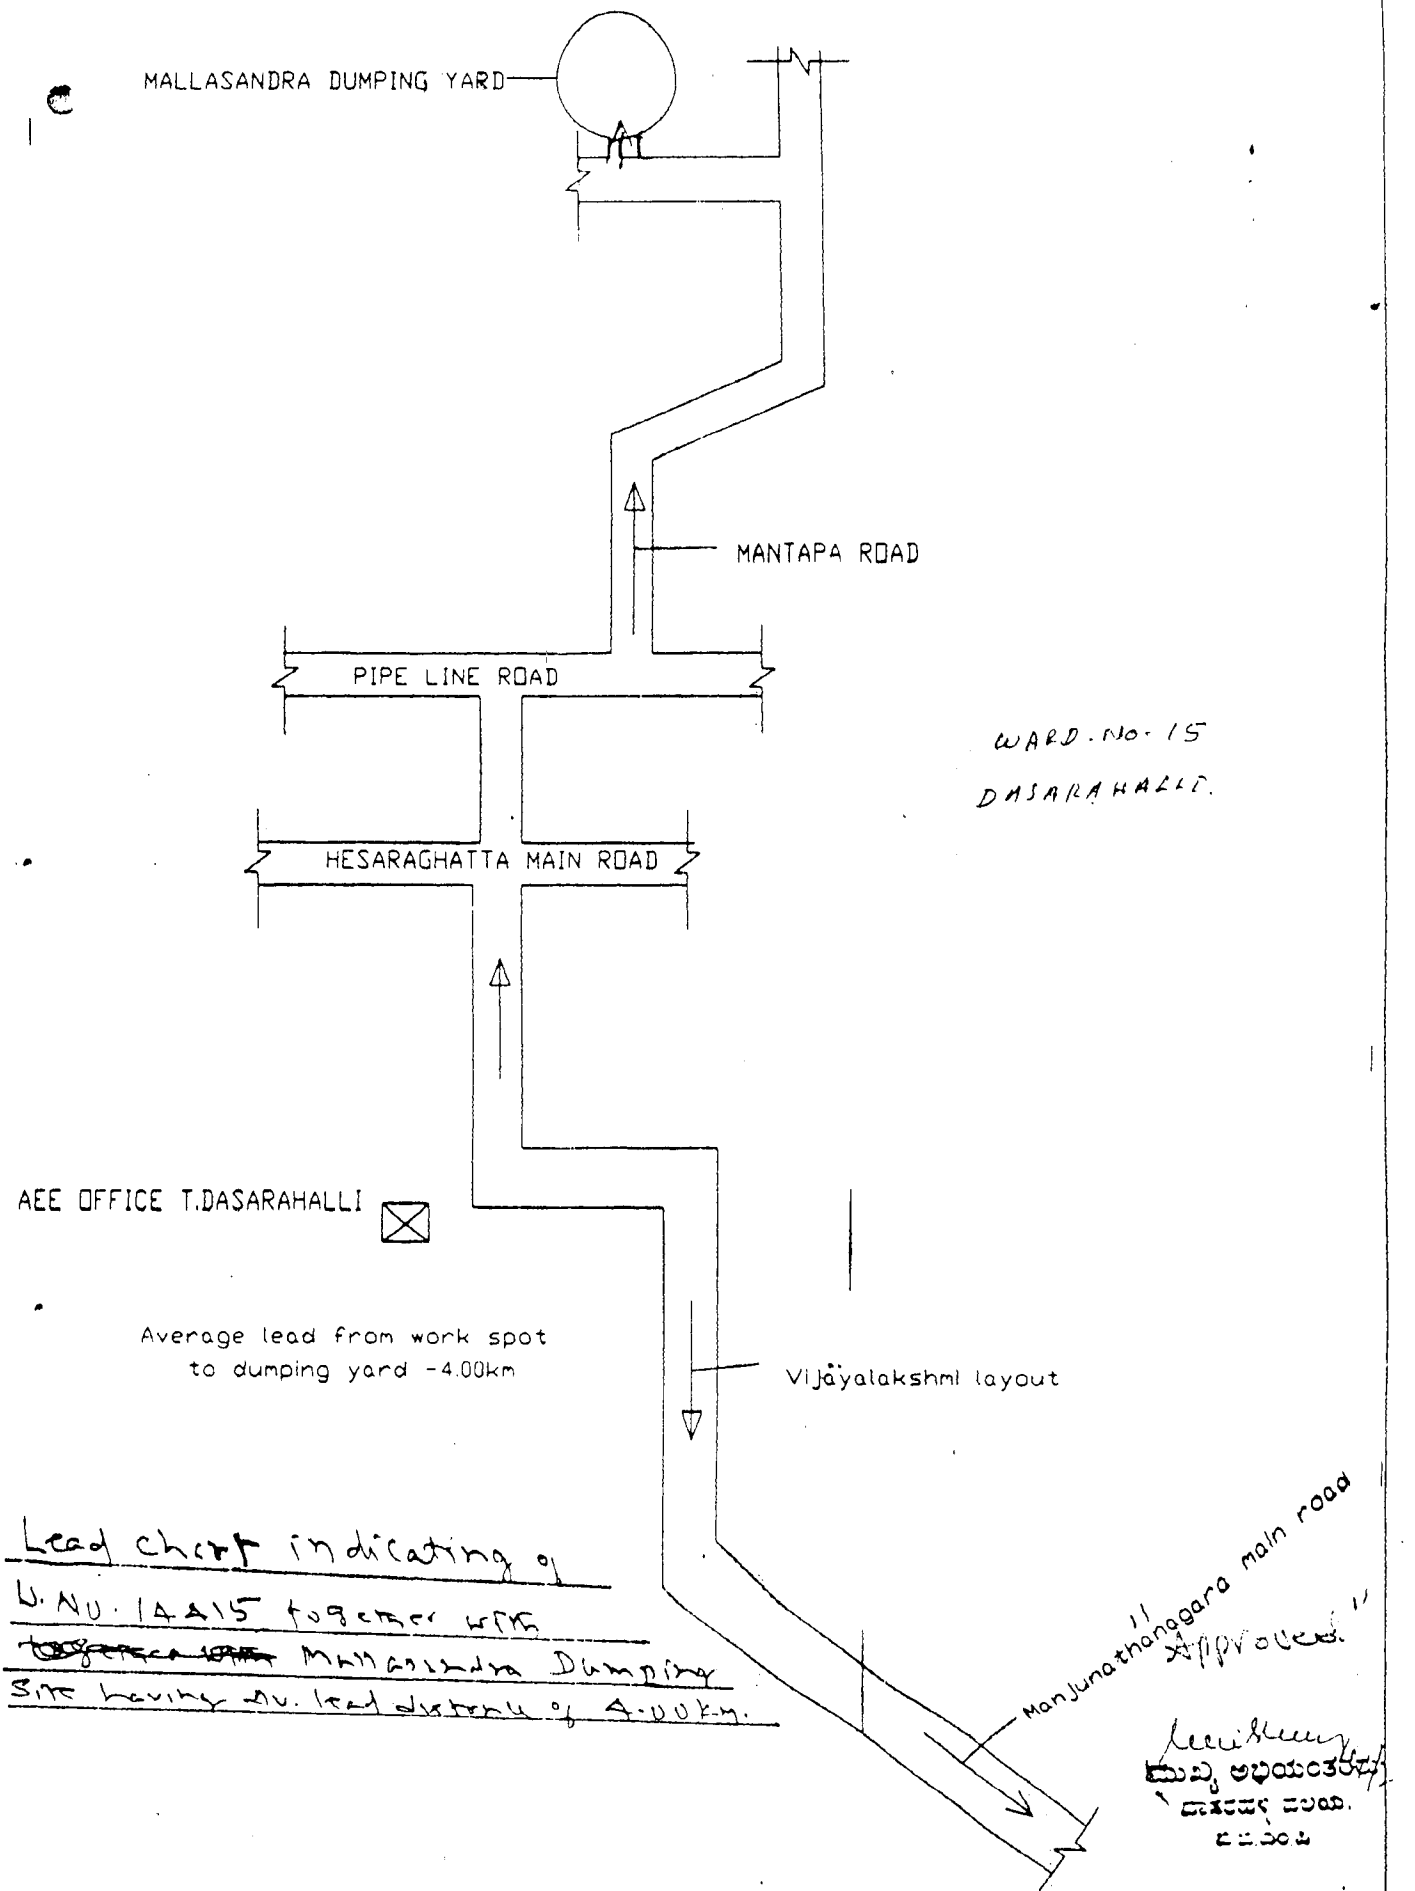

WARD. No. 15

DASARAHALLI.

Lead chart indicating of

W. No. 14 & 15 together with

~~[illegible]~~ Mallasandra Dumping

Site having Av. lead distance of 4.00 K.m.

"Approved"

Assist. Engineer
Ward no.14 & 15

Assist. Executive Engineer
T.Dasarahalli Sub Division
BBMP

Executive Engineer
Dasarahalli Divison-1
BBMP